

■ FEATURES

- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Solder dip 275 °C max. 7 s, per JESD 22-B106

■ TYPICAL APPLICATIONS

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

■ MECHANICAL DATA

- **Package:** TO-220AB
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked

■ MAXIMUM RATINGS (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MBR1080CT	MBR10100CT	MBR10120CT	MBR10150CT	MBR10200CT
Device marking code			MBR1080CT	MBR10100CT	MBR10120CT	MBR10150CT	MBR10200CT
Repetitive Peak Reverse Voltage	VRRM	V	80	100	120	150	200
Average Rectified Output Current @60Hz sine wave, R-load, Ta=25°C	IO	A			10		
Surge(Non-repetitive)Forward Current @60Hz half sine-wave, 1 cycle, Ta=25°C	IFSM	A			120		
Current Squared Time @1ms≤t<8.3ms Tj=25°C,	I ² t	A ² s			60		
Storage Temperature	Tstg	°C			-55 ~ +175		
Junction Temperature	Tj	°C			-55 ~ +175		

■ ELECTRICAL CHARACTERISTICS (Ta=25°C Unless otherwise specified)

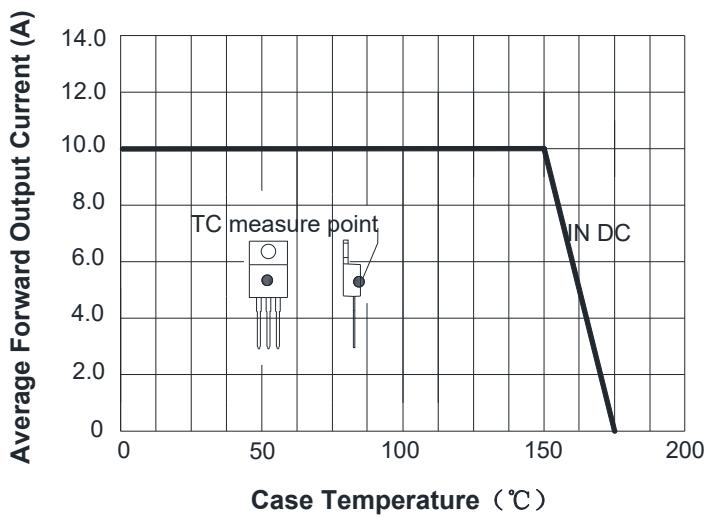
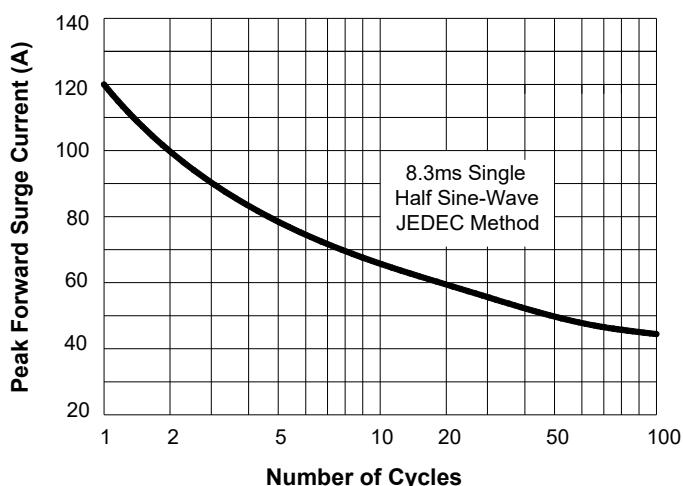
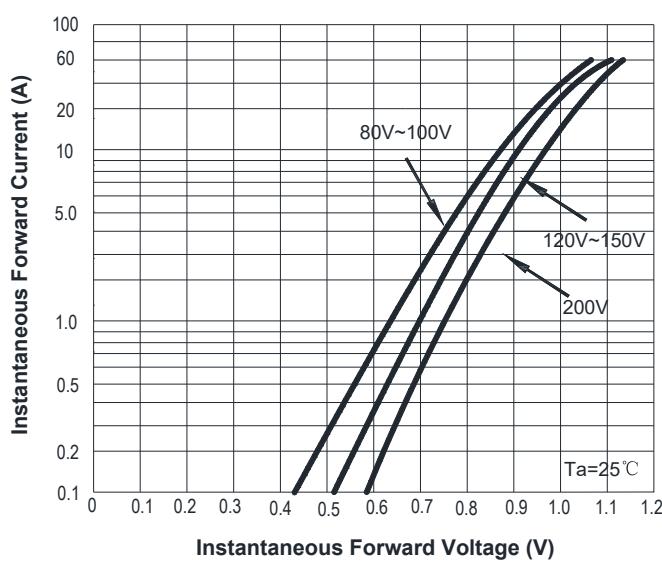
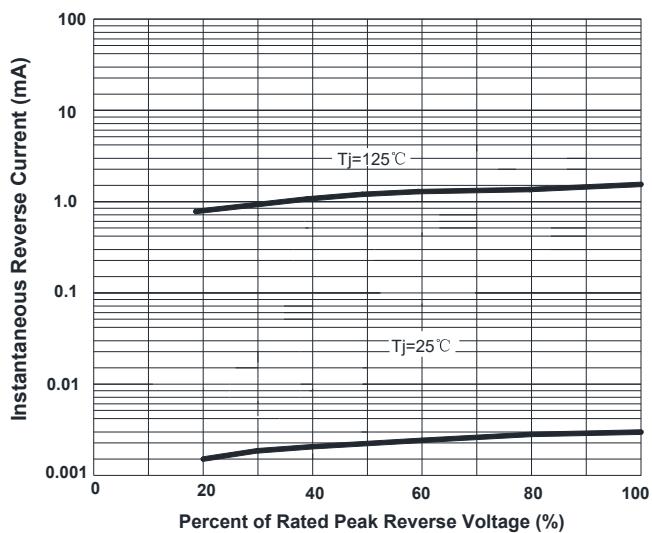
PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	MBR1080CT	MBR10100CT	MBR10120CT	MBR10150CT	MBR10200CT
Maximum instantaneous forward voltage drop per diode	VFM	V	IFM=5.0A	0.8		0.85		0.9
Maximum DC reverse current at rated DC blocking voltage per diode	I _{RRM1}	mA	VRM=VRRM Ta=25°C			0.1		
	I _{RRM2}		VRM=VRRM Ta=125°C			20		

■ THERMAL CHARACTERISTICS (Ta=25°C Unless otherwise specified)

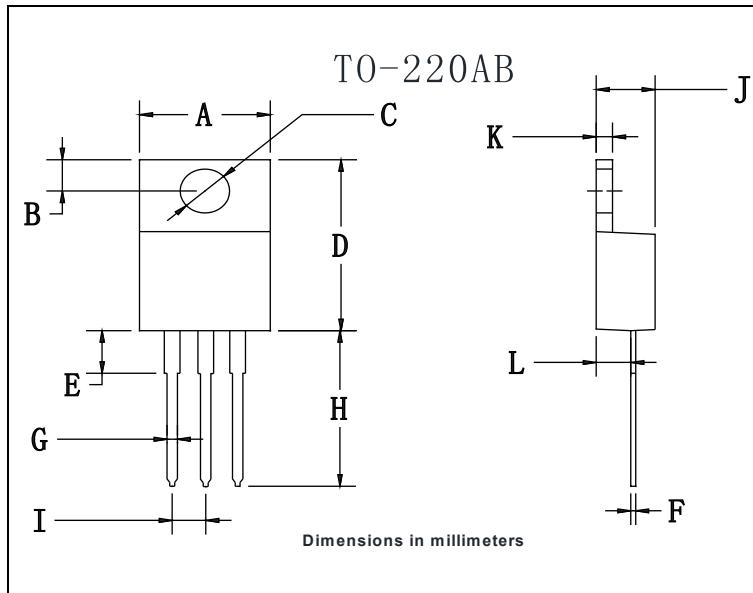
PARAMETER	SYMBOL	UNIT	MBR1080CT	MBR10100CT	MBR10120CT	MBR10150CT	MBR10200CT
Thermal Resistance Between junction and case	R _{θJ-C}	°C/W			2.0		

■ PACKAGING INFORMATION

PREFERRED P/N	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MBR1080CT THRU MBR10200CT	Approximate 1.9	50	1000	5000	Tube

■ CHARACTERISTICS (TYPICAL)
FIG1:Io -Tc Curve

FIG2: Surge Forward Current Capability

FIG3: Forward Voltage

FIG4: Instantaneous Reverse Characteristics


■ OUTLINE DIMENSIONS



TO-220AB		
Dim	Min	Max
A	9.5	10.9
B	2.22	3.27
C	3.34	4.31
D	14.5	15.5
E	3.16	4.46
F	0.28	0.64
G	0.68	0.94
H	13.06	14.62
I	2.01	3.07
J	4.04	5.1
K	1.14	1.4
L	2.14	3.19